

Focus 35

Linear profile with low glare modules

Small size with big output, ultra low glare

The Digilin Focus 35 extrusion profile is suitable for surface and suspended applications requiring low glare, in a customisable profile package.

This versatile LED linear lighting system is built to order at required lengths with selectable LED modules and beam angles. Available with high-output focused LED modules, this product is the solution to a broad range of lighting applications, all in the one product.




Specifications



Version	Focus 35		
LED Modules	3000K		4000K
Lumens	930		950
Power	7.2W		
Voltage	14.5 VDC		
Current (mA)	500mA		
Module Length (mm)	135		
Beam Options	15°, 30°, 45°		
IP Rating	IP 20		
Performance	L90(14K) >81600hrs		
Typical CRI	90+		
Dimming options	Non-dim, Mains Dim, DALI, Bluetooth (All remote driver)		
Construction Material	Powdercoated Aluminium		
Weight	1.5kg/m (profile only)		

Dimensions

Note - The Focus range is proudly designed and manufactured in our Brisbane facility

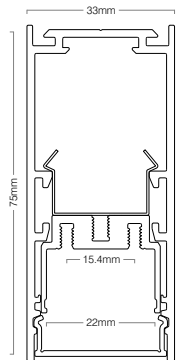


Profile Dimensions

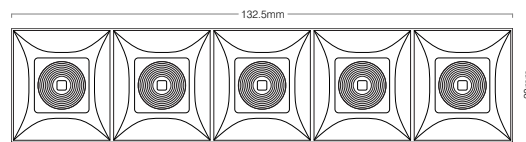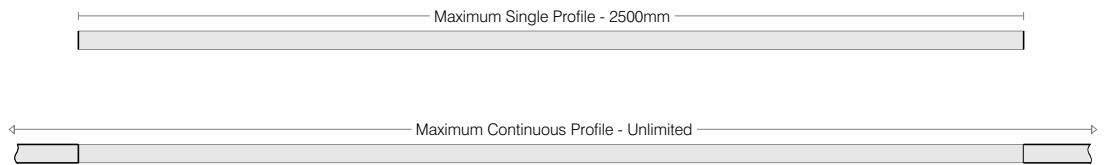

LED Module Dimensions

Ordering Codes (Profile)

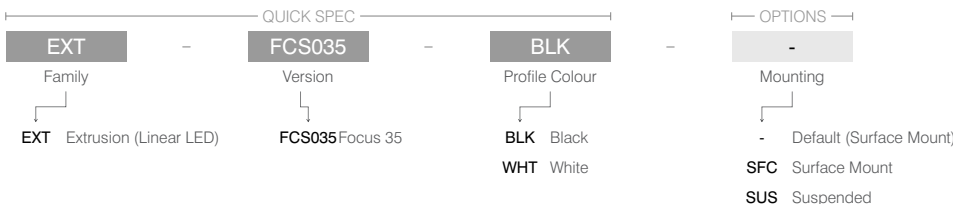

Ordering Codes (LED Module)

